

Since 80 years next to industries

Da 80 anni a fianco delle industrie



Gnutti Bortolo^{sr}

www.gnuttibortolo.com



Chicago Pneumatic

People. Passion. Performance.



March 2023

Gnutti Bortolo Srl DISTRIBUZIONE INDUSTRIALE dal 1937

Via Monsuello 34 - 25065 Lumezzane (BS)

Tel.0308926011

Email. info@gnuttibortolo.com

www.gnuttibortolo.com



Chicago
Pneumatic

INDEX

GRINDERS AND GRINDING WHEEL TOOLS	- Straight grinders	PAG. 03
	- Angular grinders	PAG. 05
PNEUMATIC TOOLS	- Impact drivers	PAG. 05
	- Ratchets	PAG. 06
	- Drills and hammers	PAG. 07



Promo prezzi netti IVA Esclusa. MARZO 2023.

Valida per articoli disponibili a magazzino fino esaurimento scorte.

GRINDERS AND GRINDING WHEEL TOOLS - Straight grinders

Mini axial grinder CP9104Q, 60000 rpm



Mini axial grinder Chicago Pneumatic CP9104Q, 60000 rpm. Little and compact, light and silent, for precision working in difficult to reach points. Ring nut valve. Supplied with hose.

PROMO
€ 148,50

ART. 98060

ART. 98060104		
DESCRIZIONE DESCRIPTION	UNITA' UNIT	VALORE VALUE
tipo kind	CP9104Q	
velocità speed	giri/min rpm	60000
potenza power	W hp	40 0,054
consumo d'aria air flow rate	l/s cfm	3,3 7
diametro della pinza collet's diameter	mm "	3 1/8
attacco aria air inlet thread	"	1/4 NPTF
diametro del tubo hose diameter	mm "	10 3/8
pressione suono ISO 15744 sound pressure ISO 15744	dB(A)	71
potenza suono ISO 15744 sound power ISO 15744	dB(A)	82
vibrazioni ISO 8662-13 vibration ISO 8662-13	m/s ²	8,3
vibrazioni α ISO 20643 vibration α ISO 20643	m/s ²	< 2,5
lunghezza totale total length	mm "	133 5,2
diametro diameter	mm "	15 0,59
peso weight	Kg lb	0,2 0,5

Mini axial grinder CP876, 30000 rpm



Mini axial grinder Chicago Pneumatic CP876, 30000 rpm. Compact light-weight design, lever valve, built in regulator. For high speed blending, smoothing, porting and deburring in confined areas.


PROMO
€ 82,50

ART. 98153

ART. 98153500		
DESCRIZIONE DESCRIPTION	UNITA' UNIT	VALORE VALUE
tipo kind	CP876	
velocità speed	giri/min rpm	30000
potenza power	W hp	216 0,3
consumo aria medio average air flow	l/s cfm	5,65 12
consumo aria effettivo actual air flow	l/s cfm	12 25
diametro della pinza collet's diameter	mm "	6,4 1/4
diametro del tubo flessibile air hose's diameter	mm "	10 3/8
presa d'aria air inlet	NPTF	1/4"
pressione suono ISO 15744 sound pressure ISO 15744	dB(A)	101,3
potenza suono ISO 15744 sound power ISO 15744	dB(A)	112,3
livello di vibrazioni vibration level	m/s ²	3
diametro diameter	mm "	35 1,38
lunghezza totale total length	mm "	121 4,75
peso weight	Kg lb	0,34 0,75

GRINDERS AND GRINDING WHEEL TOOLS - Straight grinders


Axial grinder CP7405, 28000 giri/min

ART. 98157 




PROMO
€ 126,00

Axial grinder Chicago Pneumatic CP7405, 28000 rpm. Quiet and efficient for general maintenance applications. Manual locking system of the spindle Rotate&Push. Handle covered with composite over-housing, lever valve, rear exhaust.

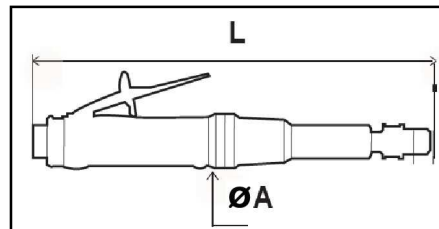

ART. 98157280		
DESCRIZIONE DESCRIPTION	UNITA' UNIT	VALORE VALUE
tipo kind	CP7405	
velocità speed	giri/min rpm	28000
potenza power	W hp	250 0,34
consumo aria air flow	l/s cfm	1,3 2,7
diametro della pinza collet's diameter	mm "	6,35 1/4
diametro del tubo flessibile air hose's diameter	mm "	10 3/8
presa d'aria air inlet	NPTF	1/4"
pressione suono ISO 15744 sound pressure ISO 15744	dB(A)	76,2
potenza suono ISO 15744 sound power ISO 15744	dB(A)	87,2
livello di vibrazioni vibration level	m/s ²	a 3,6 k 0,98
diametro A diameter A	mm "	39,2 1,57
lunghezza totale L total length L	mm "	167,3 6,59
peso weight	Kg lb	0,5 1,02


Long axial grinder CP7410, 27000 giri/min

ART. 98162 



Axial grinder Chicago Pneumatic CP7410 with long shaft, 27000 rpm. Quiet and efficient for general maintenance applications. Manual locking system of the spindle Rotate&Push. Handle covered with composite over-housing, lever valve, rear exhaust.

PROMO
€ 136,50

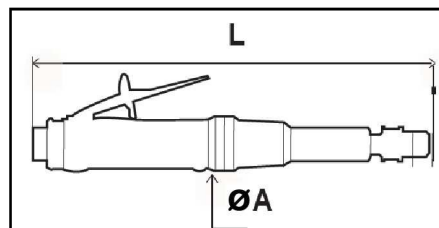

ART. 98162410		
DESCRIZIONE DESCRIPTION	UNITA' UNIT	VALORE VALUE
tipo kind	CP7410	
velocità speed	giri/min rpm	27000
potenza power	W hp	250 0,34
consumo aria air flow	l/s cfm	1,3 2,7
diametro della pinza collet's diameter	mm "	6,35 1/4
diametro del tubo flessibile air hose's diameter	mm "	10 3/8
presa d'aria air inlet	NPTF	1/4"
pressione suono ISO 15744 sound pressure ISO 15744	dB(A)	76,1
potenza suono ISO 15744 sound power ISO 15744	dB(A)	87,1
livello di vibrazioni vibration level	m/s ²	a 4,9 k 0,96
diametro A diameter A	mm "	38,5 1,51
lunghezza totale L total length L	mm "	252,5 9,9
peso weight	Kg lb	0,65 1,43

GRINDERS AND GRINDING WHEEL TOOLS - Angular grinders

Angular grinder CP7406, 23000 giri/min




Grinder Chicago Pneumatic CP7406 with angular head 90°, 23000 rpm. Quiet and efficient for general maintenance applications. Manual locking system of the spindle Rotate&Push. Handle covered with composite over-housing, lever valve, rear exhaust.

PROMO
€ 138,00


ART. 98236

ART. 98236260		
DESCRIZIONE DESCRIPTION	UNITA' UNIT	VALORE VALUE
tipo kind	CP7406	
velocità speed	giri/min rpm	23000
potenza power	W hp	250 0,34
consumo aria air flow	l/s cfm	1,3 2,7
diametro della pinza collet's diameter	mm "	6,35 1/4
diametro del tubo flessibile air hose's diameter	mm "	10 3/8
presa d'aria air inlet	NPTF	1/4"
pressione suono ISO 15744 sound pressure ISO 15744	dB(A)	78,1
potenza suono ISO 15744 sound power ISO 15744	dB(A)	89,1
livello di vibrazioni vibration level	m/s ²	a 5,4 k 1,27
lunghezza totale L total length L	mm "	163 6,4
diametro A diameter A	mm "	38,5 1,6
altezza testa H head height H	mm "	90 3,54
peso weight	Kg lb	0,6 1,32

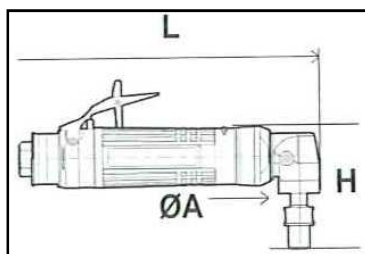

ART. 98875220

DESCRIZIONE DESCRIPTION	UNITA' UNIT	VALORE VALUE
tipo kind	CP7732C	
cod. CP CP code	8941077321	
attacco quadro square drive	"	1/2
campo di coppia working torque range	Nm ft lb	70 - 387 52 - 285
coppia max max torque	Nm ft lb	625 460
velocità speed	giri/min rpm	9410
colpi al minuto blows per minute	n/min	1400
consumo d'aria effettivo actual air flow rate	l/s cfm	10,2 22
diametro min. del tubo min hose size	mm "	10 3/8
attacco aria air inlet thread	"	1/4 NPTF
pressione suono ISO 15744 sound pressure ISO 15744	dB(A)	95,5
potenza suono ISO 15744 sound power ISO 15744	dB(A)	106,5
vibrazioni a ISO-28927-2 vibration a ISO-28927-2	m/s ²	10,8
vibrazioni k ISO-28927-2 vibration k ISO-28927-2	m/s ²	1,42
lunghezza L length L	mm "	108 4,3
altezza H height H	mm "	190 7,5
misura al centro A center size A	mm "	32,5 1,3
peso weight	Kg lb	1 2,2

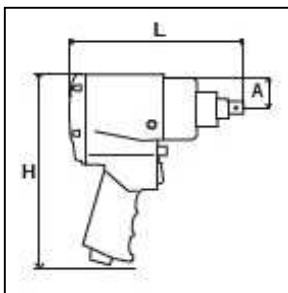

PNEUMATIC TOOLS - Impact drivers

ART. 98875

Compact impact driver CP7732-C 1/2", 138 - 420 Nm

Handle air exhaust gun impact driver Chicago Pneumatic CP7732-C with square drive 1/2", 150 - 750 Nm. Ultra-compact body made of composite and aluminium for places difficult to access, 3 power settings, lever reverse valve usable with one hand, ring retainer. Applications: installing and removing threaded fasteners in wood, metal and plastic. General maintenance line.




PROMO
€ 210,00

PNEUMATIC TOOLS - Impact drivers - Ratchets

Impact driver CP7763 3/4", 136 - 1288 Nm

ART. 98878 



Handle air exhaust gun impact driver Chicago Pneumatic CP7763 (CP code 8941077630) with square drive 3/4", 136 - 1288 Nm, max torque reverse 1630 Nm. Great power and durability, reduced weight and dimensions, combined regulator with forward / reverse, double hammer mechanism, friction ring as socket retainer. For work on suspensions, tires, pinion nuts, pad removal, engine disassembly on tractors and trucks.

PROMO
€ 520,50

ART. 98878340		
DESCRIZIONE DESCRIPTION	UNITA' UNIT	VALORE VALUE
tipo kind	CP7763	
cod. CP CP code	8941077630	
attacco quadro square drive	"	3/4
campo di coppia working torque range	Nm ft lb	136 - 1288 100 - 950
coppia max max torque	Nm ft lb	1630 1200
velocità speed	giri/min rpm	6300
colpi al minuto blows per minute	n/min	900
consumo d'aria effettivo actual air flow rate	l/s cfm	14,2 30
diametro min. del tubo min hose size	mm "	13 1/2
attacco aria air inlet thread	"	3/8 NPTF
pressione suono ISO 15744 sound pressure ISO 15744	dB(A)	96
potenza suono ISO 15744 sound power ISO 15744	dB(A)	107
vibrazioni α ISO-28927-2 vibration α ISO-28927-2	m/s ²	10,4
vibrazioni k ISO-28927-2 vibration k ISO-28927-2	m/s ²	4,2
lunghezza L length L	mm "	229 8,8
altezza H height H	mm "	
misura al centro A side to center A	mm "	45 1,8
peso weight	Kg lb	5,25 11,57

Art. 98922500		
DESCRIZIONE DESCRIPTION	UNITA' UNIT	VALORE VALUE
tipo kind	CP828H	
velocità speed	giri/min rpm	150
potenza power	Hp	0,5
campo di coppia working torque range	Nm	13 - 70
attacco quadro square drive	"	1/2
consumo aria medio medium air flow	l/m cfm	106 3,75
consumo aria effettivo actual air flow	l/m cfm	425 15
attacco aria air coupling	"	1/4 NPTF
diametro min. tubo min hose size	mm	10
pressione suono ISO 15744 sound pressure ISO 15744	dB(A)	97
potenza suono ISO 15744 sound power ISO 15744	dB(A)	108
livello di vibrazioni vibration level	m/s ²	10
lunghezza totale total length	mm "	254 10
altezza testa head height	mm "	50 1,97
diametro testa head diameter	mm "	40 1,58
peso weight	Kg	1,08

PNEUMATIC TOOLS - Ratchets

ART. 98922 

Ratchet CP828H 1/2", 13 - 70 Nm



Reversible ratchet Chicago Pneumatic CP828H with 1/2" square drive, 13 - 70 Nm, for heavy duty. Patented TriSpring head design that provides longer life, ergonomic square handle, teasing throttle for precise speed control. Application: exhaust systems, small engines, water pumps, fuel pumps, radiators, etc.

PROMO
€ 159,00

PNEUMATIC TOOLS - Drills and hammers

Chipping hammer CP7160, 3500 blows/min

ART. 98980 



Chipping hammer CP716, 3500 blows/min, robust and power design with teasing throttle and standard chisel shank. Supplied with a quick change retainer and a spring retainer.

PROMO
€ 156,00

Art. 98980352		
DESCRIZIONE DESCRIPTION	UNITA' UNIT	VALORE VALUE
tipo kind	CP7160	
cod. CP CP code	8941071600	
diametro cilindro bore diameter	mm "	19 0,8
corsa cilindro piston stroke	mm "	67 2,64
dimensioni codolo shank opening	mm "	10,2 0,401
n° colpi n° of blows	n°/min	3500
consumo aria air flow	l/s cfm	8,7 18,4
attacco aria air coupling	"	1/4 NPTF
diametro del tubo flessibile air hose diameter	mm "	10 3/8
pressione suono ISO 15744 sound pressure ISO 15744	dB(A)	98,4
potenza suono ISO 15744 sound power ISO 15744	dB(A)	109,4
vibrazioni k ISO-28927-9 vibration k ISO-28927-9	m/s ²	1,4
lunghezza totale total length	mm "	191 7,52
altezza high	mm "	194 7,64
larghezza width	mm "	58 2,28
peso weight	Kg lb	1,88 4,14

Promo prezzi netti IVA Esclusa. MARZO 2023.

Valida per articoli disponibili a magazzino fino esaurimento scorte.

Since 80 years next to industries

Da 80 anni a fianco delle industrie



Gnutti Bortolo_{ml}

***DISTRIBUZIONE INDUSTRIALE
INDUSTRIAL DISTRIBUTION***

Via Monsuello 34 — 25065 Lumezzane (Brescia)

ITALY — P. IVA 00547380980

Tel.0308926011

info@gnuttibortolo.com

www.gnuttibortolo.com